Quiet Cabins

SPEC SHEET

SOUNDBOX VRS SERIES

Soundbox Single

A private room for one person's calls and video meetings. It arrives as furniture and runs from one outlet.

Edition October 2026 quietcabins.ca

AT A GLANCE

A Private Phone Room With a Glass Back.

One person gets a room with a door, light, fresh air and power, anywhere on an open floor. The glass back keeps it bright, and it runs from one standard outlet.

35 dB
less speech outside the closed door
Rated sound reduction

1 person
on a stool at a wall desk
Desk and stool included

10 sq ft
of floor, 3 ft 3 in by 3 ft 1 in
0.9 m² of floor

1 outlet
standard 120 V, no electrician
Light, air and power

The Soundbox Single (VRS-S).

Booth Facts

Soundbox Single · VRS-S

Speech Reduction

35 dB — Rated at 35 dB

Seats	1
Exterior, W × D × H	39.4 × 37 × 82.7 in
Floor Area	10.1 sq ft
Fits Under	8 ft ceiling, 13 in to spare
Power	1 standard 120 V outlet
Power Cord	Right side, low, near the back
Air	Continuous, adaptive
Light	Dimmable, warm to cool
Install	One afternoon
Moves	On casters
Warranty	Written terms with your quote
Quote	Itemised, install options

The same label is on every Quiet Cabins spec sheet, so models compare line by line. Every figure is confirmed on your written quote.

WHO NEEDS WHICH PAGE

The Team
- In Use 03
- Inside the Room 04
- Sound 05

Facilities
- Drawings 06
- Technical Data 07
- Building Checklist 09

Finance
- Business Case 10
- Timeline 11

IN USE

The Call Stays in the Booth.

One person steps in for the calls, video meetings and focused work that should not carry across an open floor.

Calls on the Open Floor

One person takes a call at the wall desk while the floor keeps working around them. The light above the door shows the booth is taken.

Patient Calls in a Clinic

Results, referrals and follow-ups, away from the waiting room.

Video Meetings in a Public Office

Staff join a video call without booking a boardroom.

Parent Calls in a School Office

Counsellors and staff talk privately without leaving the office.

INSIDE THE ROOM

Everything in the Booth Is Built In.

Light, air, power, a desk and a stool arrive installed. You supply one wall outlet.

Inside, from the doorway.

1. **Light Strip**
   Dimmable, warm to crisp.
2. **Spot Lamp**
   Lights the desk on its own.
3. **Glass Back**
   Keeps the booth bright.
4. **Control Panel**
   Lights, fan, an outlet and two USB-A.
5. **Wall Desk**
   700 by 300 mm, top at 1050 mm.
6. **Stool**
   Height adjustable, with a footrest.
7. **Acoustic Felt**
   Stops echo. Accent band chosen per order.
8. **Vents**
   Air in at the ceiling, out low on the walls.

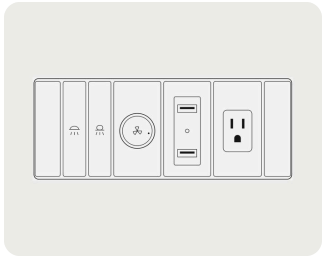

Control Panel
Lights, fan speed, power and USB on one plate.

Flat Pull
On the full-height glass door.

Light Strip
Tunable from 2800 K to 6500 K.

Casters
With levelling feet for uneven floors.

SOUND

A Phone Call Stays Inside.

Speech loses 35 dB on its way through the walls and glass. Outside, a call arrives quieter than the background hum of a working office.

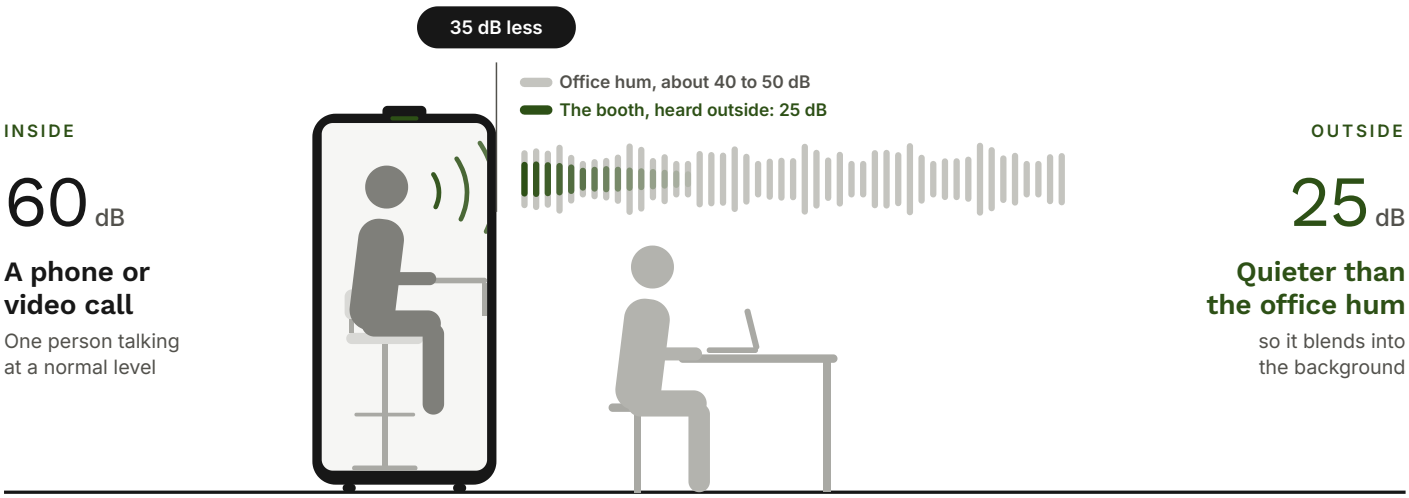

What 35 dB Less Sounds Like

Every 10 dB sounds about half as loud. Thirty-five less is three and a half halvings: under one-tenth as loud, from a conversation down to below a whisper.

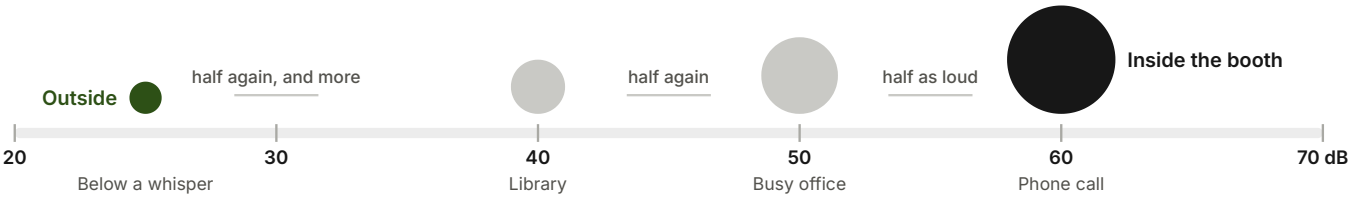

Rated Sound Reduction

This booth is rated at 35 dB of sound reduction. Every 10 dB sounds about half as loud.

What It Is Not

- It does not block every sound. A raised voice or a laugh can still be heard faintly outside.
- On site, results also depend on the room and its background noise.

DIMENSIONS

Drawn to Scale.

Exterior 39.4 × 37 × 82.7 in (1000 × 940 × 2100 mm). Floor area 10.1 sq ft (0.9 m²).

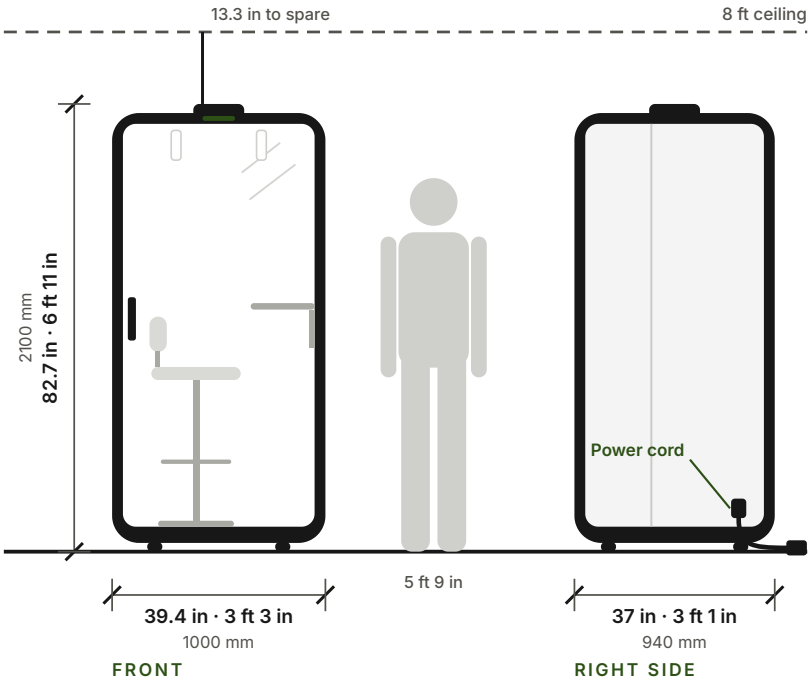

FRONT RIGHT SIDE

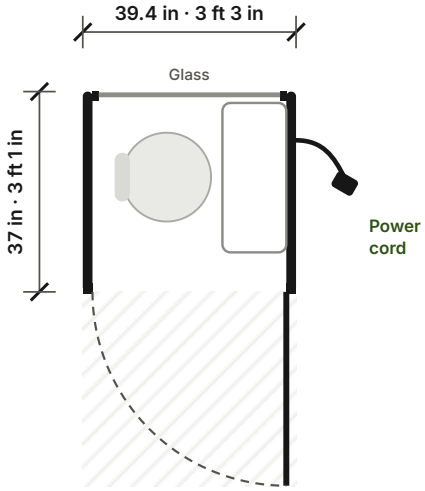

Hatched: keep about 3 ft clear for the door and the way in

PLAN, FRONT AT THE BOTTOM
FURNITURE INDICATIVE

Ceiling

Fits under a standard 8 ft ceiling with 13 in to spare. The fan draws air in at the roof, so keep that space open. In a sprinklered building, see page 9.

Power Cord

Leaves the right side wall as you face the door, low and near the back. Plan the outlet on that side and leave room for the plug.

In Front

Leave about 3 ft clear for the door to swing open and for one person to step in.

Placement

Stands against a wall, in a corner or on an open floor. Nothing is fixed to the building.

Getting It In

Arrives in crates as panels and goes together on site. We check doors, elevator and route before you order.

TECHNICAL DATA

The Full Specification.

Grouped the way a facilities review reads it. Figures marked “about” are rounded, and every figure is confirmed on your written quote.

DIMENSIONS

Exterior, W × D × H	**39.4 × 37 × 82.7 in** 3 ft 3 in × 3 ft 1 in × 6 ft 11 in · 1000 × 940 × 2100 mm
Interior, W × D × H	**about 35 × 32.5 × 77.2 in** 890 × 825 × 1960 mm
Floor Area	**10.1 sq ft** 0.9 m²
Ceiling Height Needed	**8 ft** Keep the space above the roof open for the fan

WEIGHT AND FLOOR

Weight	**about 476 lb** 216 kg, as published by Soundbox
Floor Load	**about 47 psf** Empty. Office floors are commonly designed for 50 psf

PEOPLE AND FURNITURE

Seats	**1**
Furniture	**A stool and a wall desk** Desk 700 × 300 mm on the right wall, top at 1050 mm. Stool 420 × 420 mm, 985 mm high.

SOUND

Sound Reduction	**35 dB** Rated sound reduction
Testing	**Soundbox acoustic test centre** Certificate with your approval pack

AIR, LIGHT AND POWER

Ventilation	**Continuous, adaptive airflow** In at the roof, out low on the side walls. Adjusts to presence and temperature.
Lighting	**LED strip, dimmable and tunable** 2800 K to 6500 K, plus a desk spot lamp
Occupancy	**Light above the door** Shows when the booth is in use
Supply	**One standard 120 V receptacle** Cord leaves the right side, low, near the back
Inside	**Outlet and 2 USB-A** On the control panel, with light switches and a fan dial

CONSTRUCTION

Frame	**Aluminium** Gunmetal grey shell as standard
Walls	**40 mm composite panels** Carbon plastic composite, felt-lined inside
Glass	**Laminated** The door and a panel in the back wall. The side walls are solid.
Base	**Casters and levelling feet** Rolls to a new spot on the same floor

WARRANTY AND MAKER

Warranty	**Written terms with your quote**
Service	**Serviced from Ontario** Warranty requests at quietcabins.ca/pages/warranty-request
Maker	**Soundbox Acoustics** Supplied, delivered and serviced in Canada by Quiet Cabins

Certifications and Testing

Canadian electrical ratings and the certificate pack come with your quote.

GREENGUARD Gold	**ANSI/BIFMA** Furniture	**ISO 23351-1** Lab tested	**CE** marking	**FCC** EMC	**RoHS** Compliant
Low chemical emissions, UL 2818	Furniture safety and durability	Speech privacy tested in a laboratory	European safety conformity	US electronic interference limits	Hazardous substances restricted

CONFIGURED

Specified for Your Floor.

The same booth in three kinds of workplace. Shell, accent fabric and lighting are chosen per order and confirmed on your quote.

Open-plan Office

Calls step off the floor, and the meeting rooms stay free for groups.

Credit Union Back Office

Member calls away from the teller line.

Hospital Floor

A private spot for calls between patients.

Chosen on Your Quote

Shell

Gunmetal grey as standard. Custom colours on request.

Accent Band

One of three accent fabrics, chosen per order.

Furniture

A stool and a wall desk, included.

Lighting

Tunable strip, plus a spot lamp over the desk.

Install

Our installers, or two of your people with the tools in the box.

FOR FACILITIES

What Your Building Team Will Ask.

Short answers to the questions a facilities lead, fire engineer or landlord raises, and what we send them.

QUESTION	ANSWER	WE SEND
Ceiling Height	82.7 in tall to the top of the roof fan, so it fits under a standard 8 ft ceiling with 13.3 in to spare. Keep that space open for air.	Drawings with heights
Sprinklers	At 10.1 sq ft it is under the 24 sq ft size NFPA 13 (2025) lets go without its own head, where your authority has adopted that edition. Your fire engineer decides. The roof has an opening for a head.	Booth drawings for your fire protection engineer
Fire Alarm	With the door shut, the alarm is quieter inside too. Your alarm designer may add a visual signal.	Sound reduction data for the alarm designer
Power	One standard 120 V receptacle on the right side of the booth. No hardwiring, no new circuit in most offices.	Canadian electrical ratings, confirmed in writing with your quote
Floor Loading	About 476 lb over 10.1 sq ft, about 47 psf empty. Office floors are commonly designed for 50 psf.	Weight and base details for your structural engineer
Getting It In	Arrives in crates as panels. Needs a clear route from the dock or front door to the spot.	Crate sizes and an access check before you order
Permits	Supplied as freestanding furniture, which in most jurisdictions needs no building permit. Booths tied into sprinklers may be reviewed.	Product data and drawings for any review
Landlord	Nothing is fixed to the floor, walls or ceiling, and it leaves with you.	A furniture classification letter for your landlord
Air and Heat	A fan draws room air in at the roof and lets it out low on the side walls. No duct connection.	Airflow and fan data
Accessibility	The standard booth is not designed for wheelchair access.	Ask us about accessible options
Moving It Later	Rolls on casters to a new spot on the same floor. For another floor or building, it comes apart and goes back together.	Relocation by our team, quoted on request

A planning guide, not code advice. The authority having jurisdiction and your engineers have the final word.

FOR FINANCE

Build a Room, or Bring One In.

How the Soundbox Single compares with building a small phone room in leased space.

	Build a Phone Room	Soundbox Single
COST	$180 to $350 per sq ft for commercial fit-out. A 40 sq ft room: $7,200 to $14,000 before design and furniture.	One written, itemised quote, with delivery and install inside the number.
TIME	Design, permit, trades, then construction. Usually weeks to months.	Installed in an afternoon once it arrives. Delivery date confirmed on your quote.
DISRUPTION	Dust, noise and trades on your floor while people work.	Installed after hours if you prefer. Nothing is drilled into the building.
APPROVALS	Usually a building permit and landlord sign-off.	Supplied as furniture, with a classification letter for your landlord.
SOUND	Depends on the build. Walls that stop at the ceiling tile let speech over the top.	35 dB sound reduction.
WHEN YOU MOVE	Stays with the building.	Comes with you.
ACCOUNTING	A leasehold improvement, written off over the lease.	Furniture and equipment, typically CCA Class 8 in Canada. Confirm with your accountant.

THE CASE IN ONE PARAGRAPH

We need a private space where one person can take confidential calls and video meetings without leaving the floor. Building a phone room would usually mean a permit, trades on our floor and a room we leave behind when the lease ends. The Soundbox Single is rated at 35 dB of sound reduction, runs from one standard outlet, is installed in an afternoon, and moves with us. It is bought as furniture, with delivery, installation and the warranty terms in one written quote.

Written for your approval request. Copy it as is.

Ways to Pay

- ✓ Buy, lease or finance
- ✓ Purchase orders and invoicing welcome
- ✓ Our installers, or self-assembly
- ✓ Per-unit pricing improves with quantity

At six calls a day, the booth hosts about 1,500 calls a year. Divide your quote by that number to see the cost of each one.

YOUR PRICE

Your price is on your written quote, itemised, with delivery and installation included.

TIMELINE

What Happens Next.

Six steps from this sheet to the first call in the booth, and who handles each one.

Quiet Cabins You

TODAY	DIRECT LINE	YOUR PACE	DATE ON YOUR QUOTE	ONE AFTERNOON	NEXT MORNING
1	2	3	4	5	6
Share	**Answer**	**Deposit**	**Shipping**	**Delivery and Install**	**First Call**
Forward it to whoever signs off.	We answer your team's questions directly.	Pay the deposit to confirm your order.	Your booth ships on the dispatch date in your quote.	It arrives, and we handle the install.	Plug in, close the door, start.

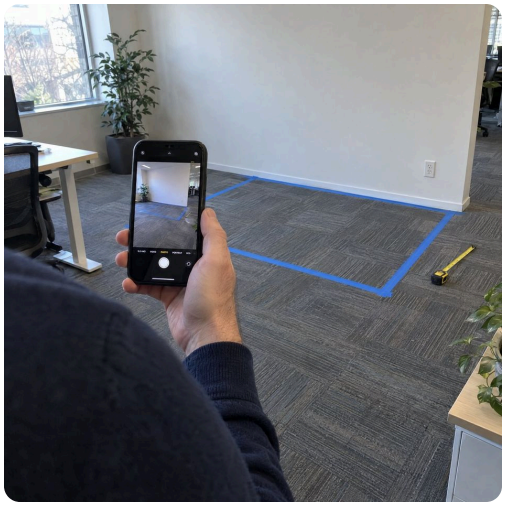

01 Tape out the spot and check the route in.

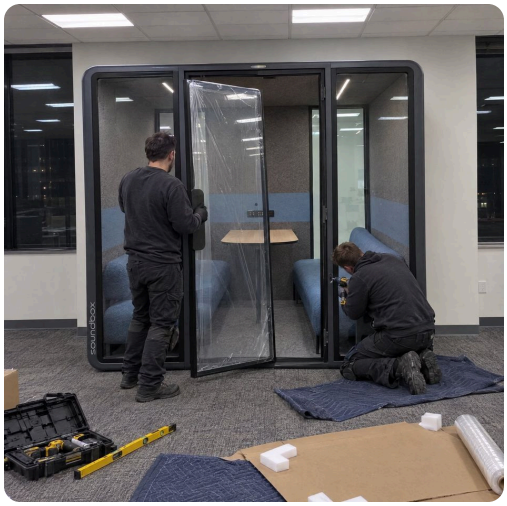

02 The panels go together on site. A Soundbox Collaborative is shown.

03 One standard outlet powers it.

04 Ready for the first call.

How It Goes In

Each step, from an empty spot to the first call.

INSTALL
One afternoon, by our installers

TOOLS
In the box, if your team assembles it

POWER
One standard 120 V outlet

LATER
Rolls on casters to a new spot

Our showroom at 410 Adelaide St W, Toronto.

Questions From Your Team? Ask Us Directly.

Send us anything facilities, finance or your landlord asks, and we answer them directly. Or visit our Toronto showroom before you sign.

See It Online
quietcabins.ca/products/vrs-s

SHOWROOM
410 Adelaide St W, Suite 220, Toronto, ON M5V 1S8

PHONE
647-323-4006

EMAIL
info@quietcabins.ca

WEB
quietcabins.ca

QUIET CABINS BOOTHS AT WORK FOR

Canadian Mental Health Association Durham *Mental health for all* · OneSchool Global · Voyago · Adelaide House Coworking · hubTGI

Quiet Cabins

Canadian owned and operated. Stocked, delivered, installed and serviced from Ontario.
Specifications current as of October 2026. Every figure is confirmed on your written quote.